




Standalone Adapter Basic
Concept

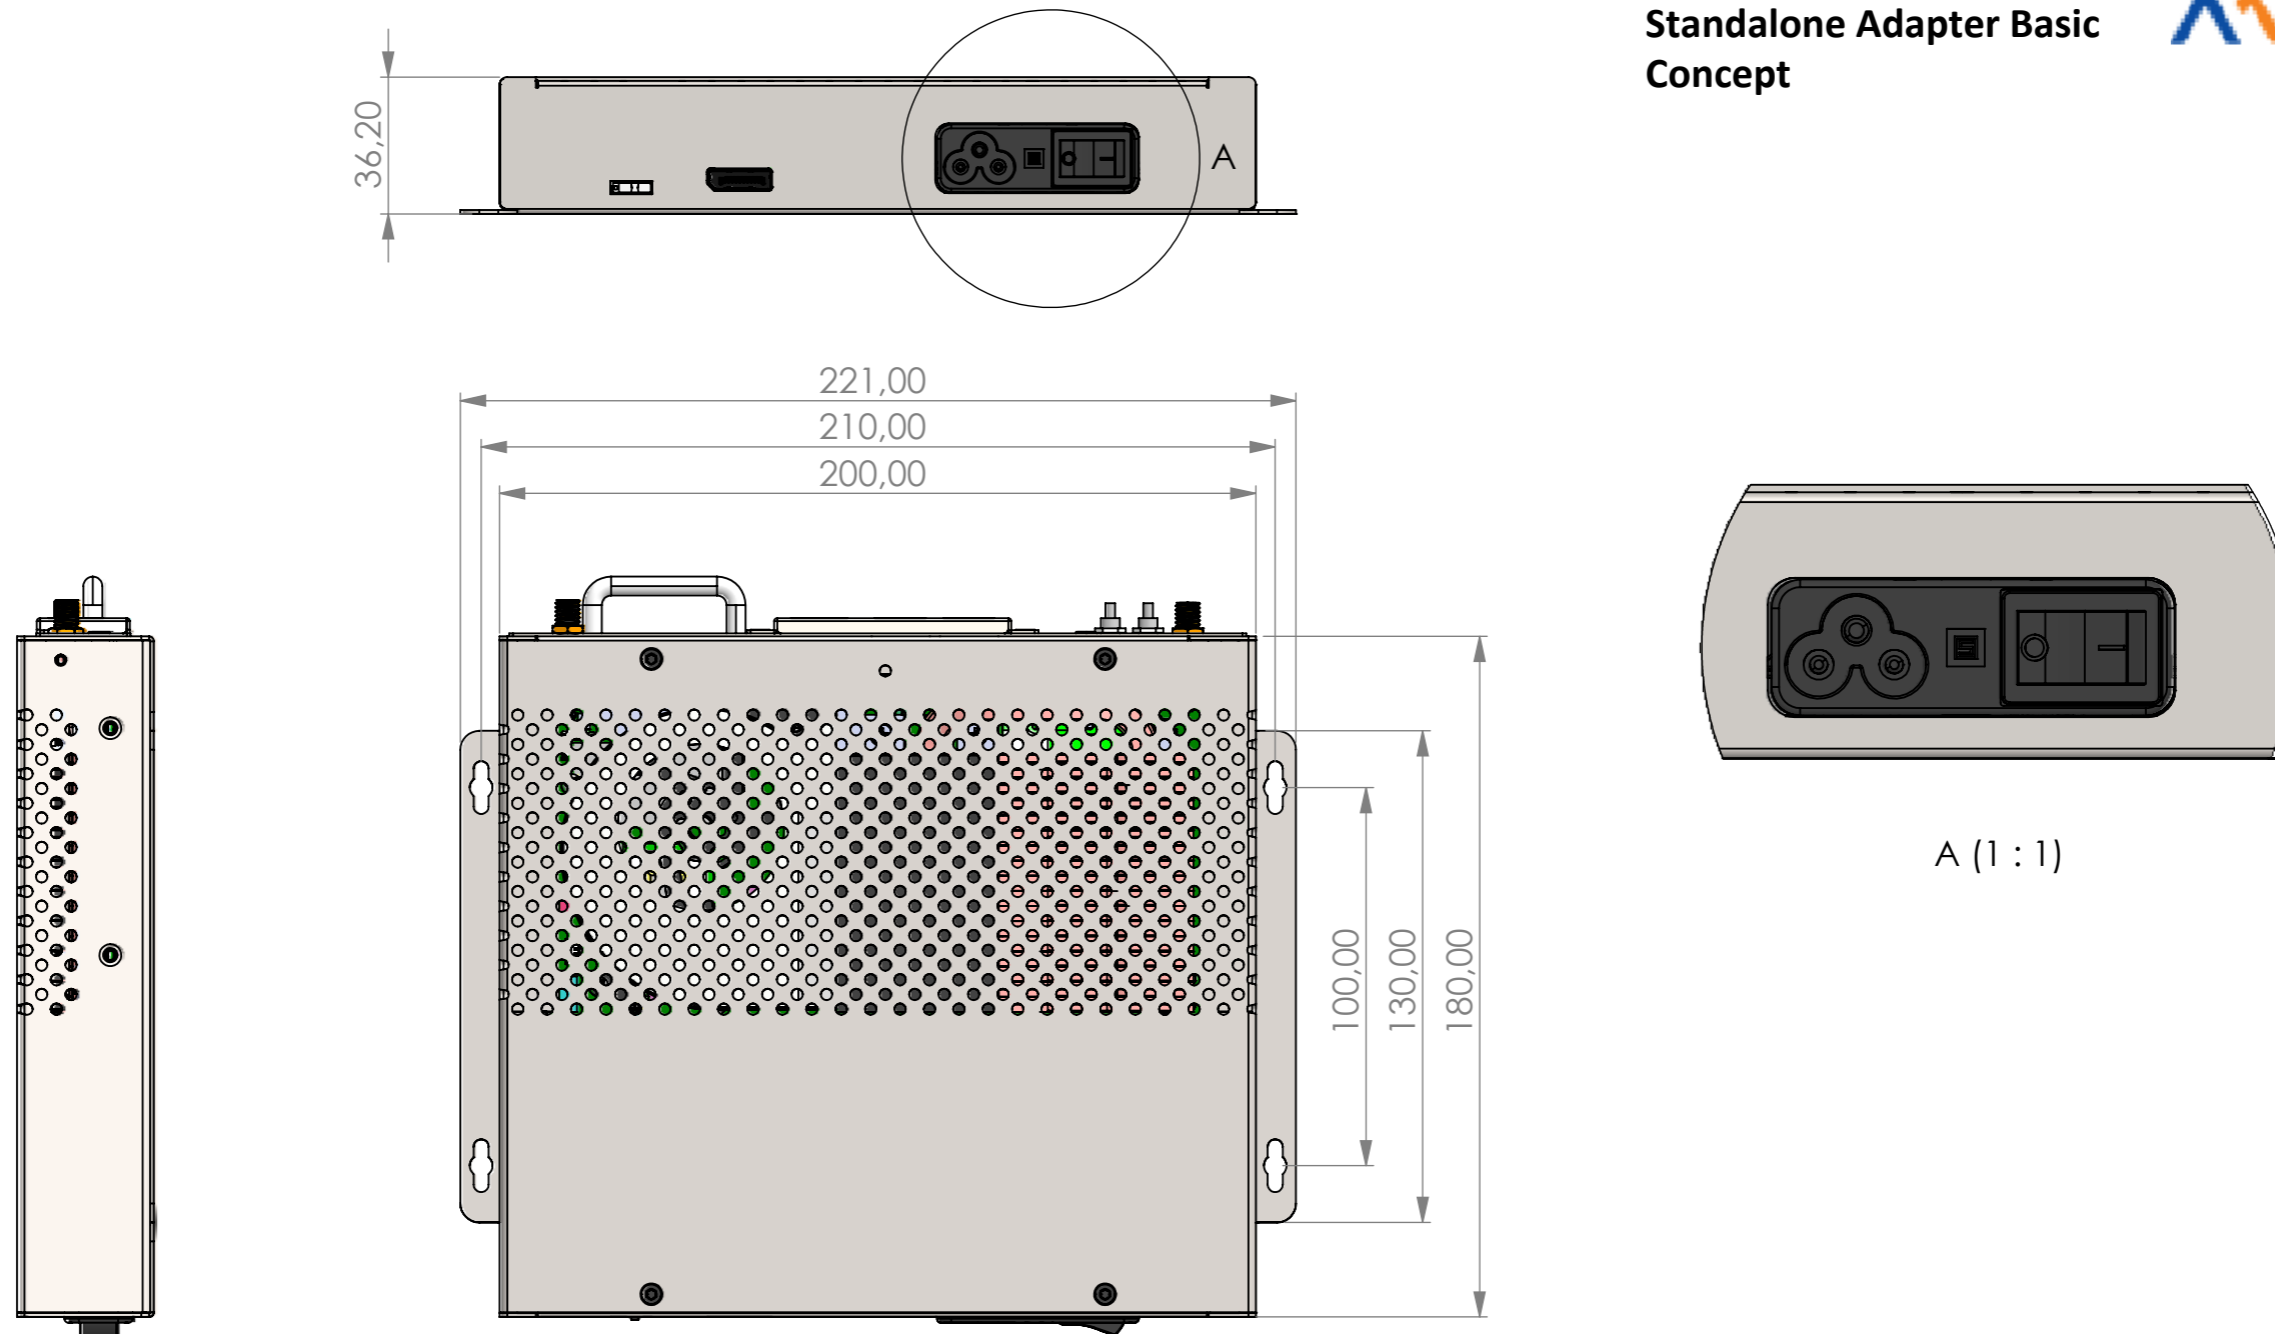

Feature:

- Internal Powersupply 90 Watt full isolated
- 80~305Vac input (suitable for 277Vac in North America)
- Protections: short circuit / overload / over voltage
- Powersupply Certified to ITE 62368-1 safeties: UL/CUL/TUV/CB/EAC/CE

Powercord for IEC-C6 connector

Displayoutput : DisplayPort

